




Precision Series T - 1/2 Watt 1/8" shaft diameter

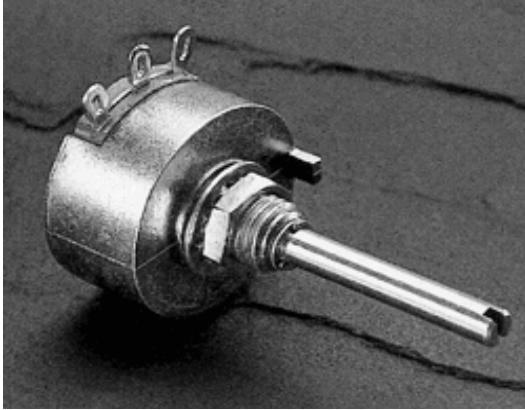

Precision series T/RV5 potentiometers provide a low profile with lateral lug terminals.

FEATURES:

- hot molded carbon element
- one piece housing and bushing
- stainless steel shaft
- quality meeting or exceeding MIL-R-94 - QPL listed

OPTIONS:

- custom shafts
- special tapers
- customer specified marking

ELECTRICAL SPECIFICATIONS:

- Resistance range, linear taper:** 100 Ω to 5 Meg Ω
- Resistance range, logarithmic taper:** 150 Ω to 1 Meg Ω
- Resistance tolerance:** $\pm 10\%$ or $\pm 20\%$
- Resistance taper:** linear, logarithmic, reverse logarithmic;
other tapers by special order
- Power rating:** 0.5 watts at 70°C derated to 0 watts at 120°C
- Insulation resistance:**
dry: 10K Meg Ω
wet: 100K Meg Ω
- Dielectric strength:** 900 V RMS at sea level
- Operating voltage:** 350 V, subject to power rating

MECHANICAL SPECIFICATIONS:


- Mechanical rotation:** 300°
- Operating torque:** 1 oz/in to 6 oz/in
- Rotational life:** 25,000 cycles

ENVIRONMENTAL SPECIFICATIONS:

- Operating temperature:** - 65°C to +125°C
- Resistance to soldering heat:** 350°C for 5 seconds
- Humidity range:** per MIL-R-94
- Vibration range:** per MIL-R-94
- Shock resistance:** per MIL-R-94
- Load life:** 1000 hours at 70°C



DRAWING:

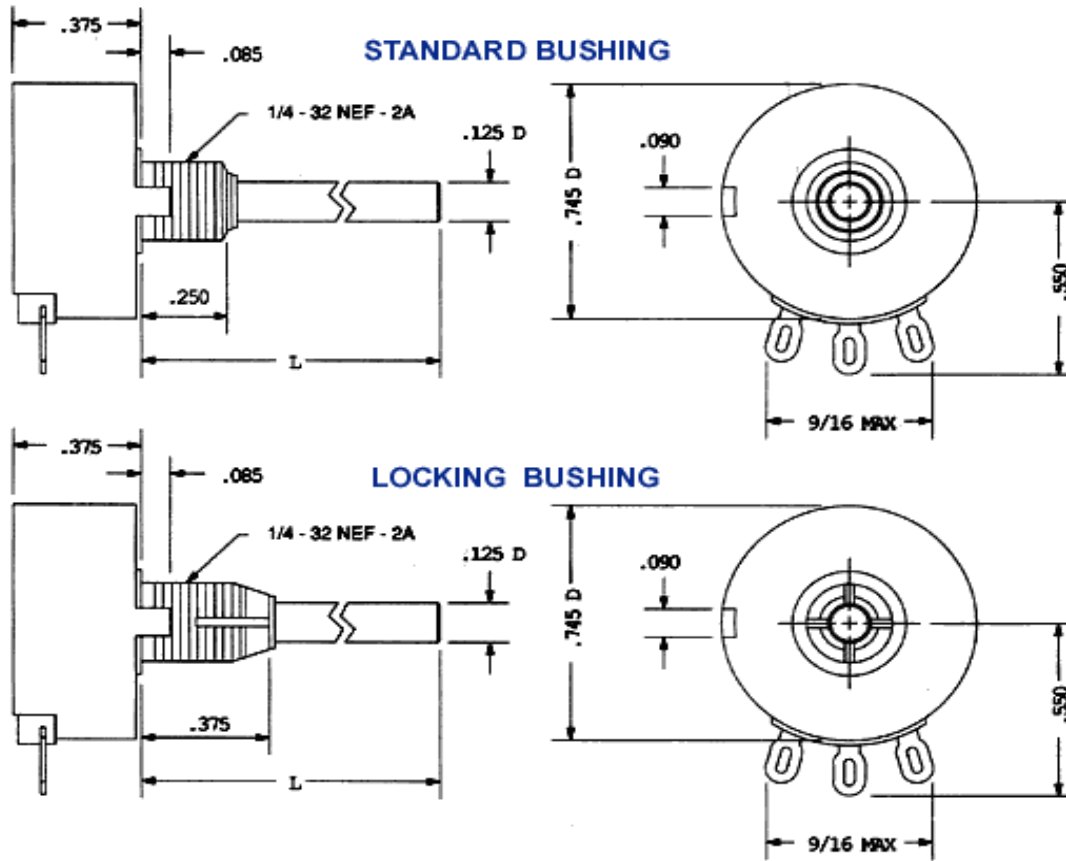

ORDERING INFORMATION:

Ordering Information - Commercial Part Numbers							
Series	Bushing	Bushing Length	Taper	Resistance Value	Tolerance	Shaft Style	Shaft Length
T = series T	Blank = standard L = locking	Blank = 1/4"	U = linear A = logarithmic B = reverse logarithmic	Total resistance value in Ω : first 2 digits significant, third digit = number of zeroes	1 = 10% of nominal 2 = 20% of nominal	R = round S = slotted F = flatted	16 = 1/2" 20 = 5/8" 24 = 3/4" 28 = 7/8"
Example: TU5021S28							
note: not all part number combinations are valid							

Ordering Information - Military Part Numbers							
Style	Bushing	Switch	Temperature & Moisture Characteristics	Shaft Style	Shaft Length	Resistance Value	Taper & Tolerance
RV5 = MIL style RV5	N = standard L = locking	A = without switch	Y = as per MIL-R-94	S = slotted	L = 3/8" B = 1/2" A = 5/8" D = 7/8"	Total resistance value in Ω : first 2 digits significant, third digit = number of zeroes	A = linear 10% B = linear 20% C = logarithmic 10% D = logarithmic 20% E = reverse logarithmic 10% F = reverse logarithmic 20%

Example: RV5NAYSD502A
note: not all part number combinations are valid