


Precision Sales Inc.
 www.precisionsales.com
 eparts@precisionsales.com
 610-359-1002

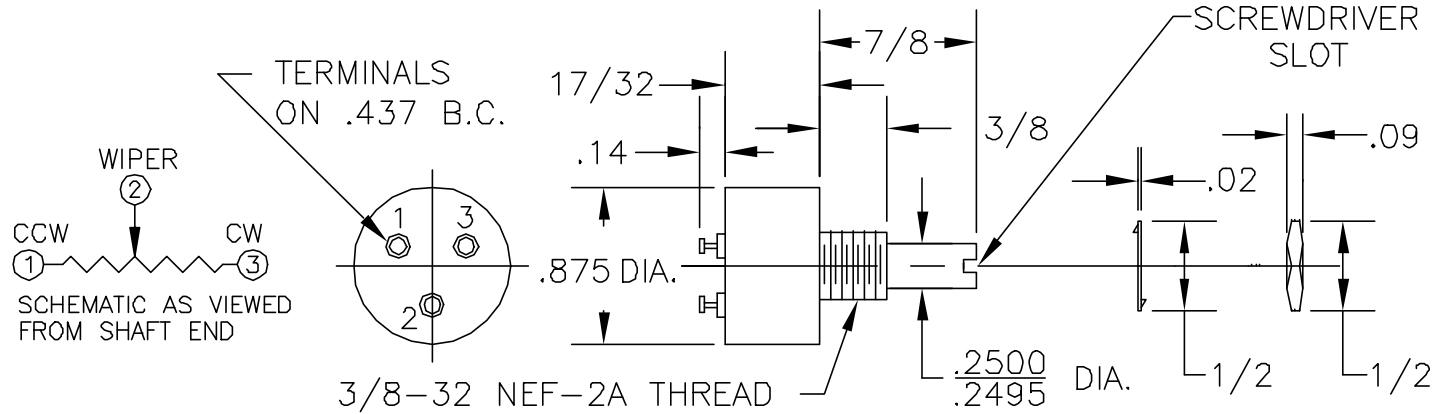

DASH NO.	RESISTANCE (OHMS)
501	500
102	1,000
202	2,000
252	2,500
502	5,000
103	10,000
203	20,000
253	25,000
503	50,000

11. LIFE: 5,000,000 CYCLES AT 40 RPM.
10. DIELECTRIC STRENGTH: 750 VOLTS AC.
9. POWER RATING: 1.0 WATT AT 40°C.
8. OPERATING TEMPERATURE RANGE: -55° TO 105°C.
7. TEMP. COEFFICIENT OF RESISTANCE: 500PPM/°C.
6. TOTAL MECHANICAL TRAVEL: 360°, CONTINUOUS.
5. THEORETICAL ELECTRICAL TRAVEL: 340°±5°.
4. INDEPENDENT LINEARITY: ±2%.
3. THEORETICAL RESOLUTION: INFINITE.
2. TOTAL RESISTANCE TOLERANCE: ±20%.
1. TOTAL RESISTANCE: SEE CHART (OTHER VALUES ON REQUEST)
16. BRASS SLEEVE BEARING.
15. STAINLESS STEEL SHAFT.
14. MOLDED HOUSING.
13. RUNNING TORQUE: .6 OUNCE-INCH, MAX.
12. OUTPUT SMOOTHNESS: 1%.